

FIG. 1

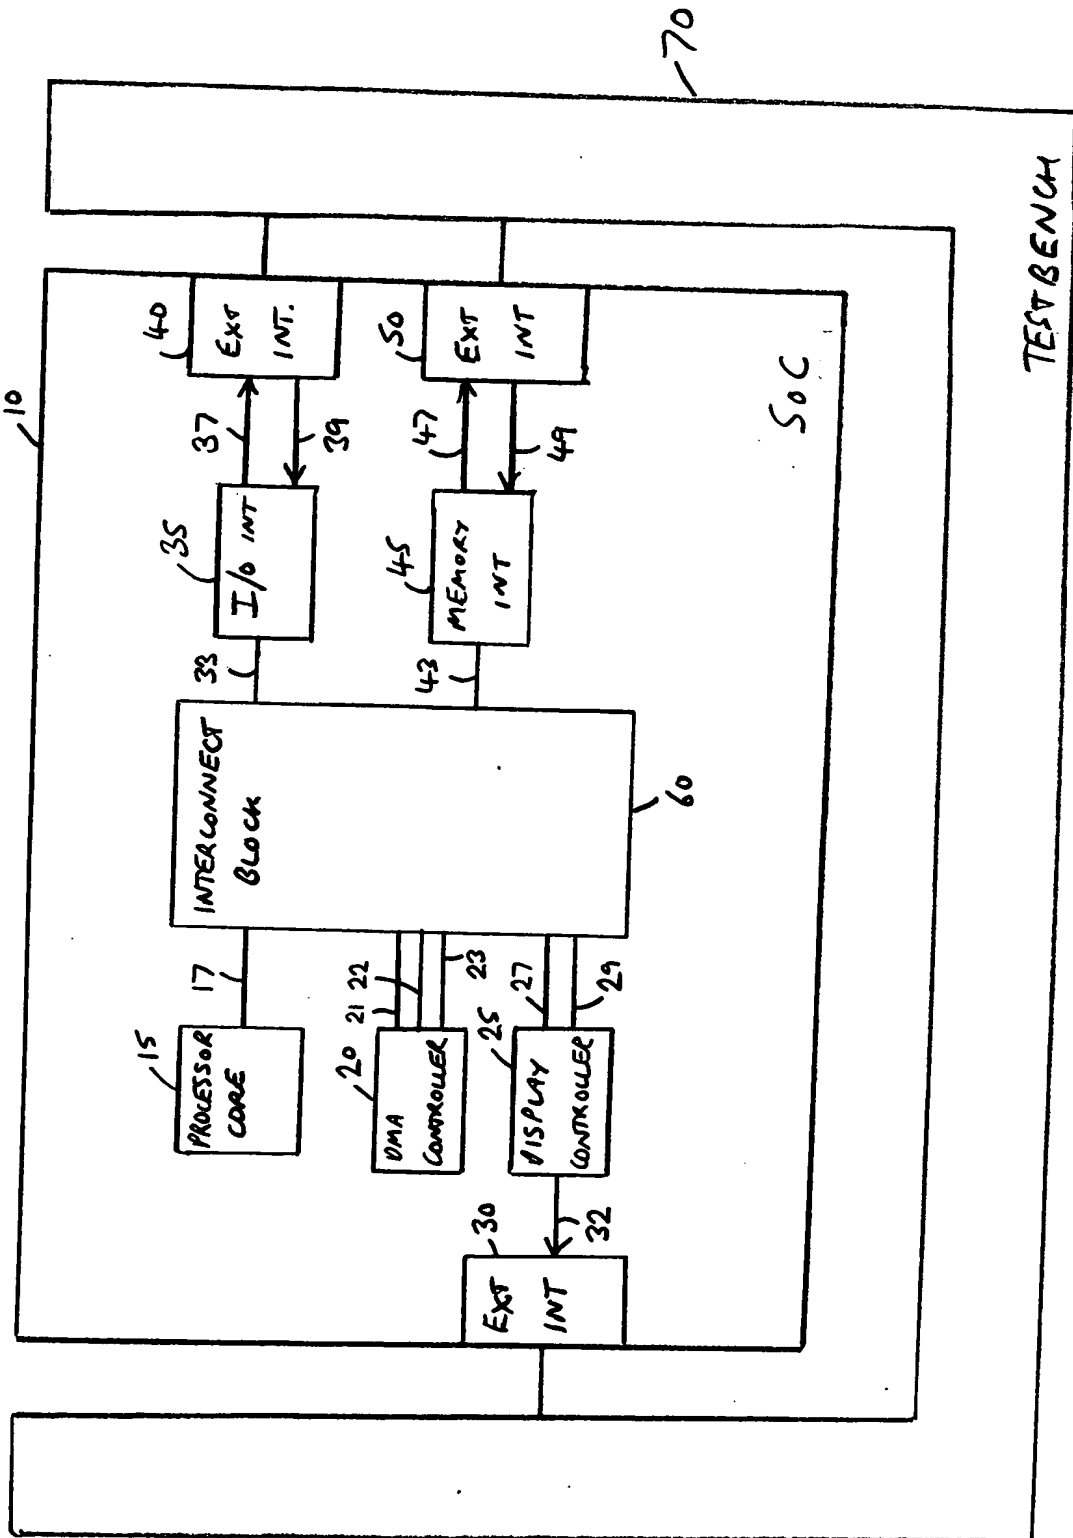


FIG. 2 (PRIOR ART)

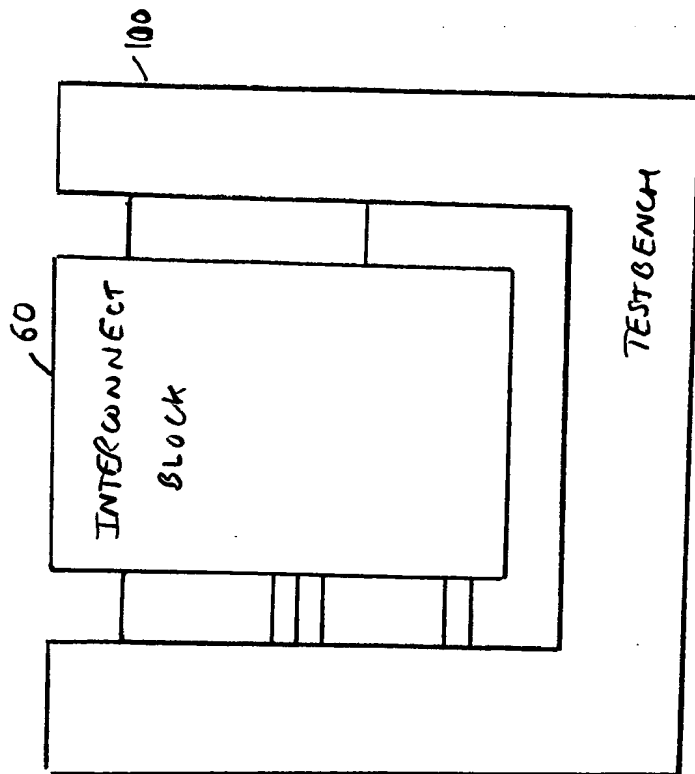


FIG. 3

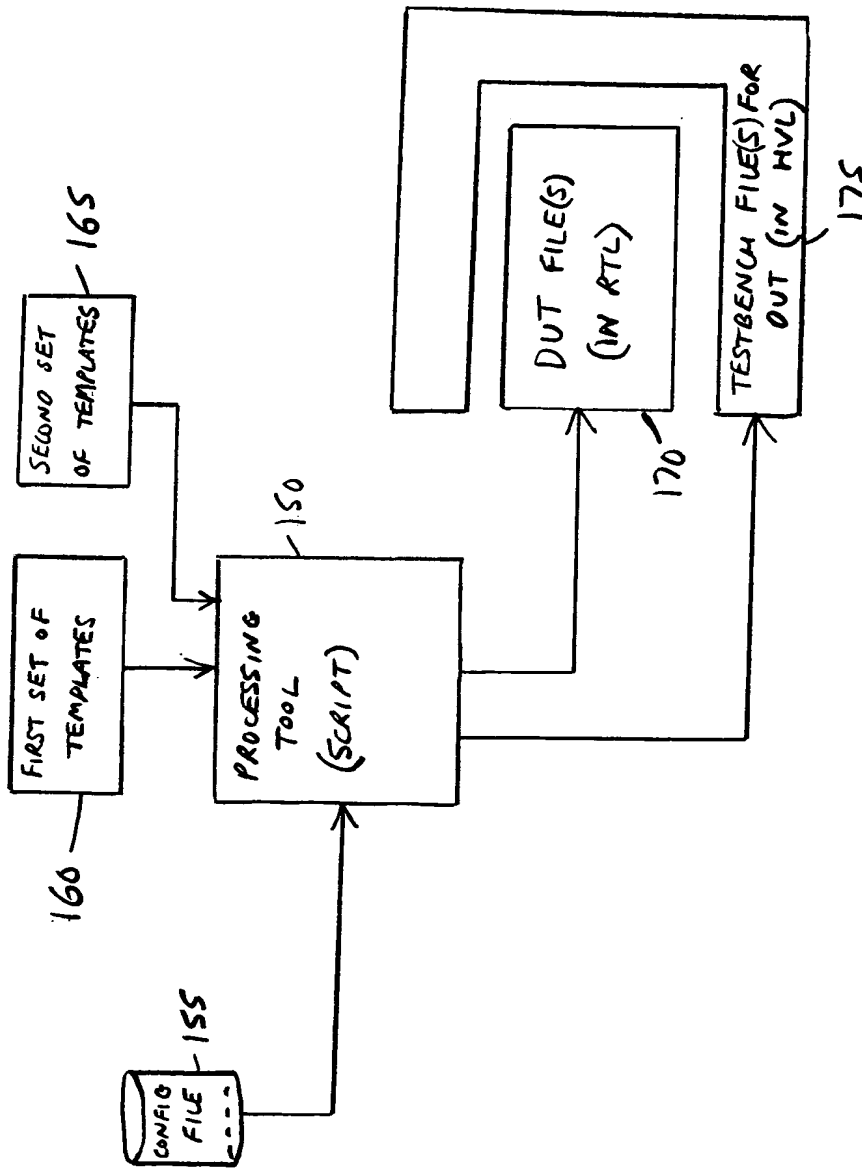


FIG. 4

5/11

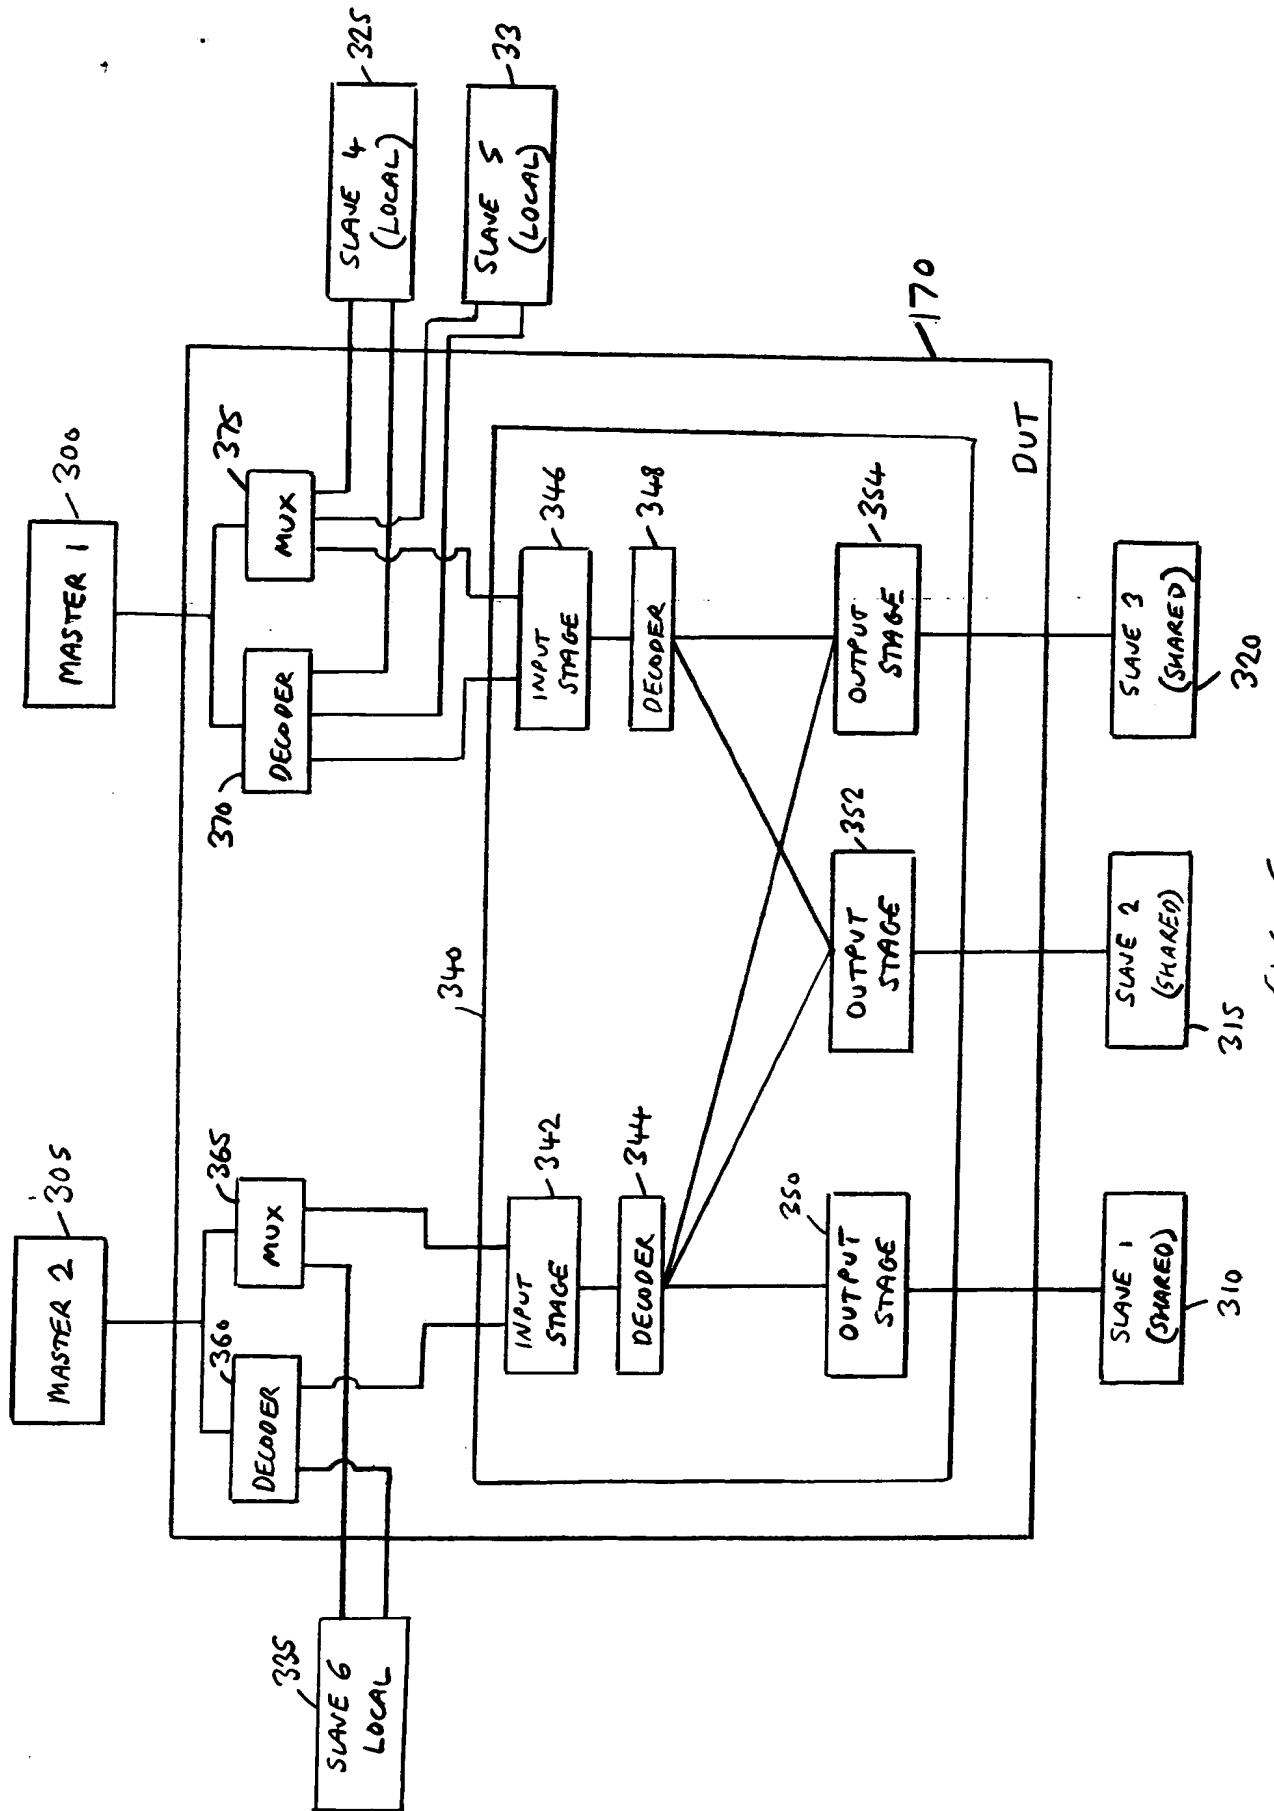


FIG. 5

6/11

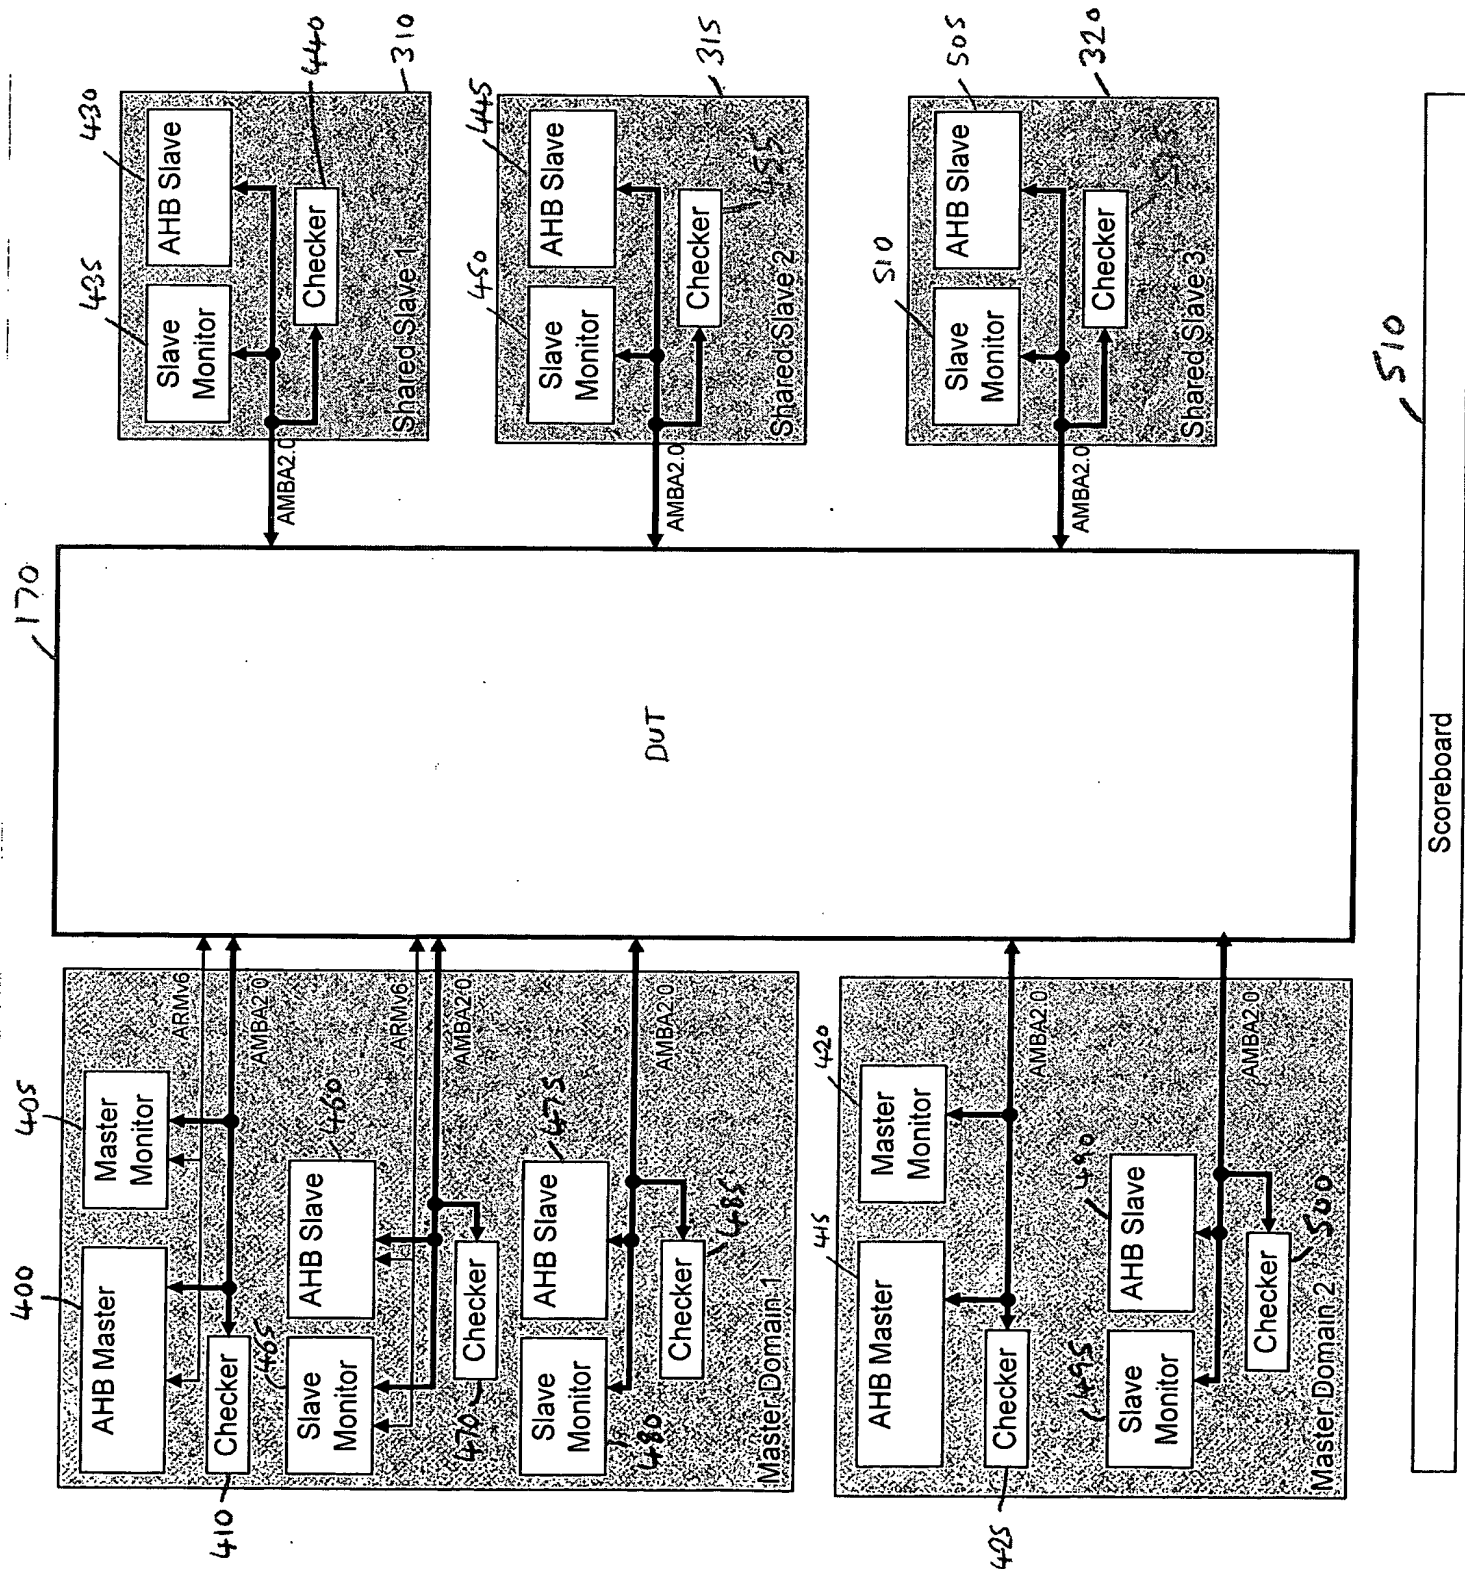


FIG. 6

# CONFIG FILE EXTRACT

M1 (v6) → Slave 4 local (v6) → address map range A → B  
 Slave 5 local (standard) → " " " " C → D  
 Slave 2 shared (standard) → " " " " E → F  
 Slave 3 shared (standard) → " " " " G → H

M2 (standard) → Slave 6 local (standard) → " " " " A → D  
 Slave 1 shared (standard) → " " " " I → J  
 Slave 2 shared (standard) → " " " " E → F  
 Slave 3 shared (standard) → " " " " G → H

7/11

FIG 7

8/11

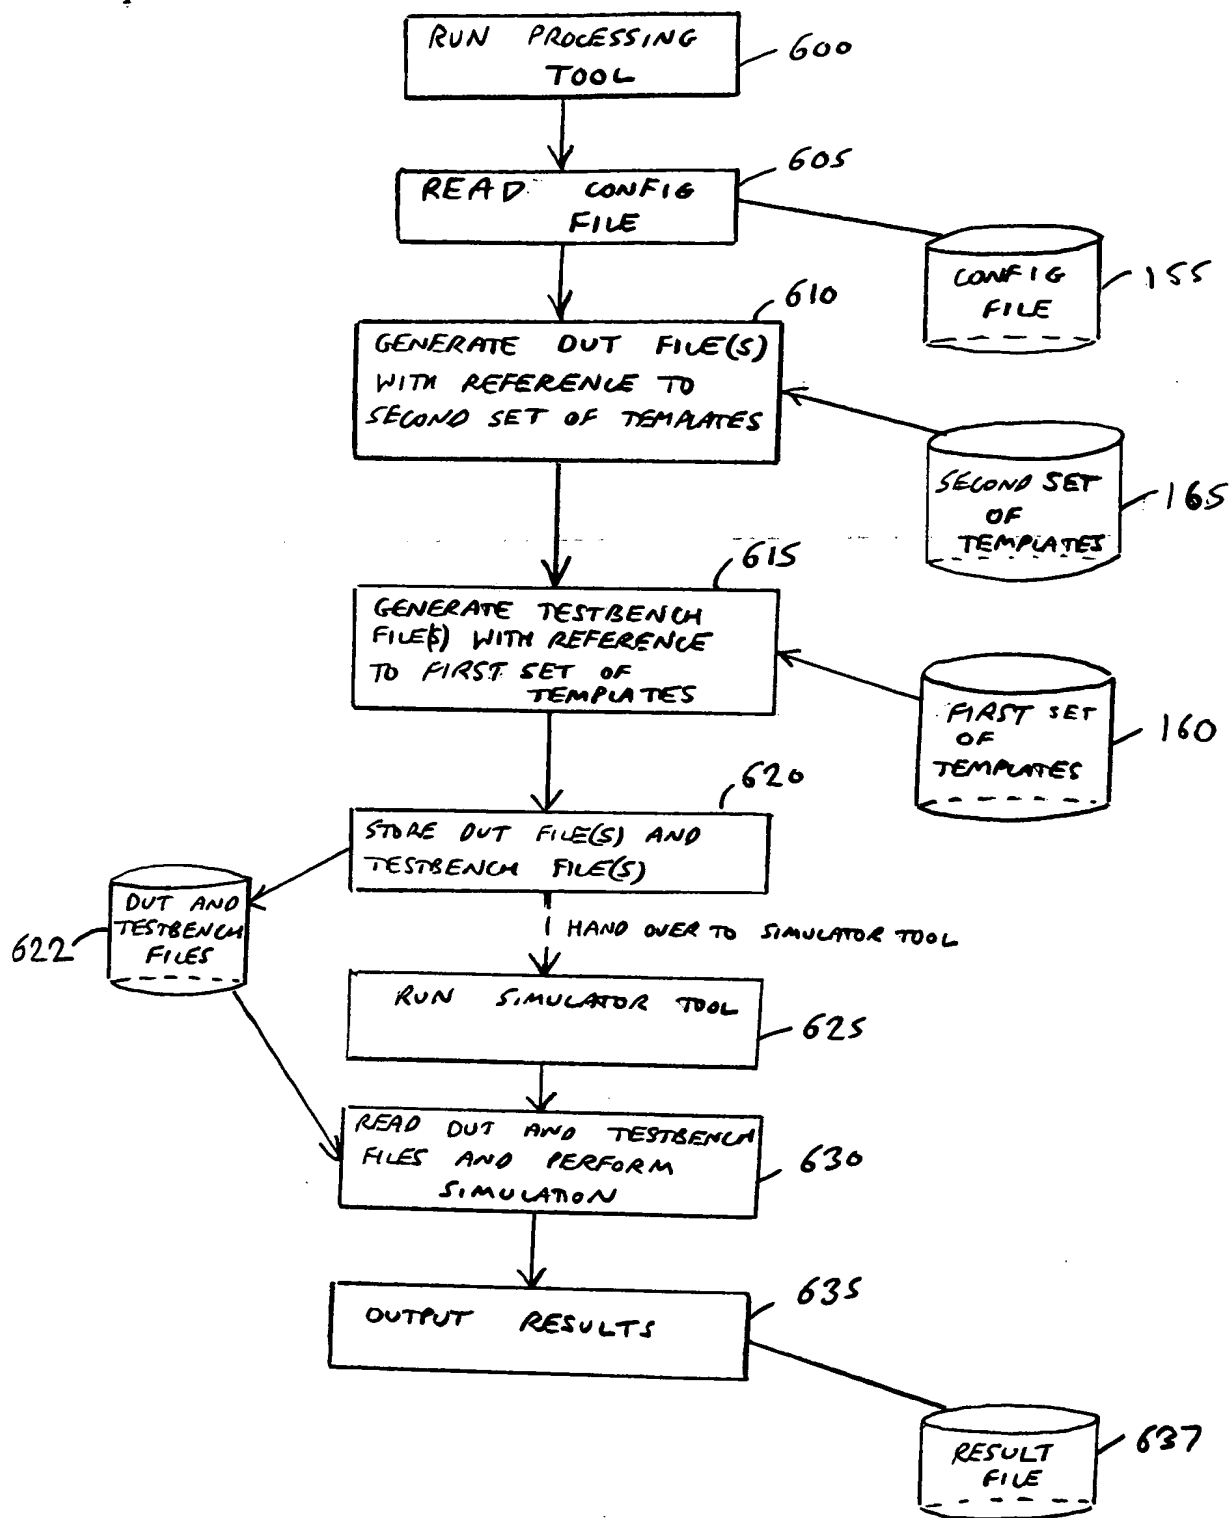


FIG 8

9/11

200

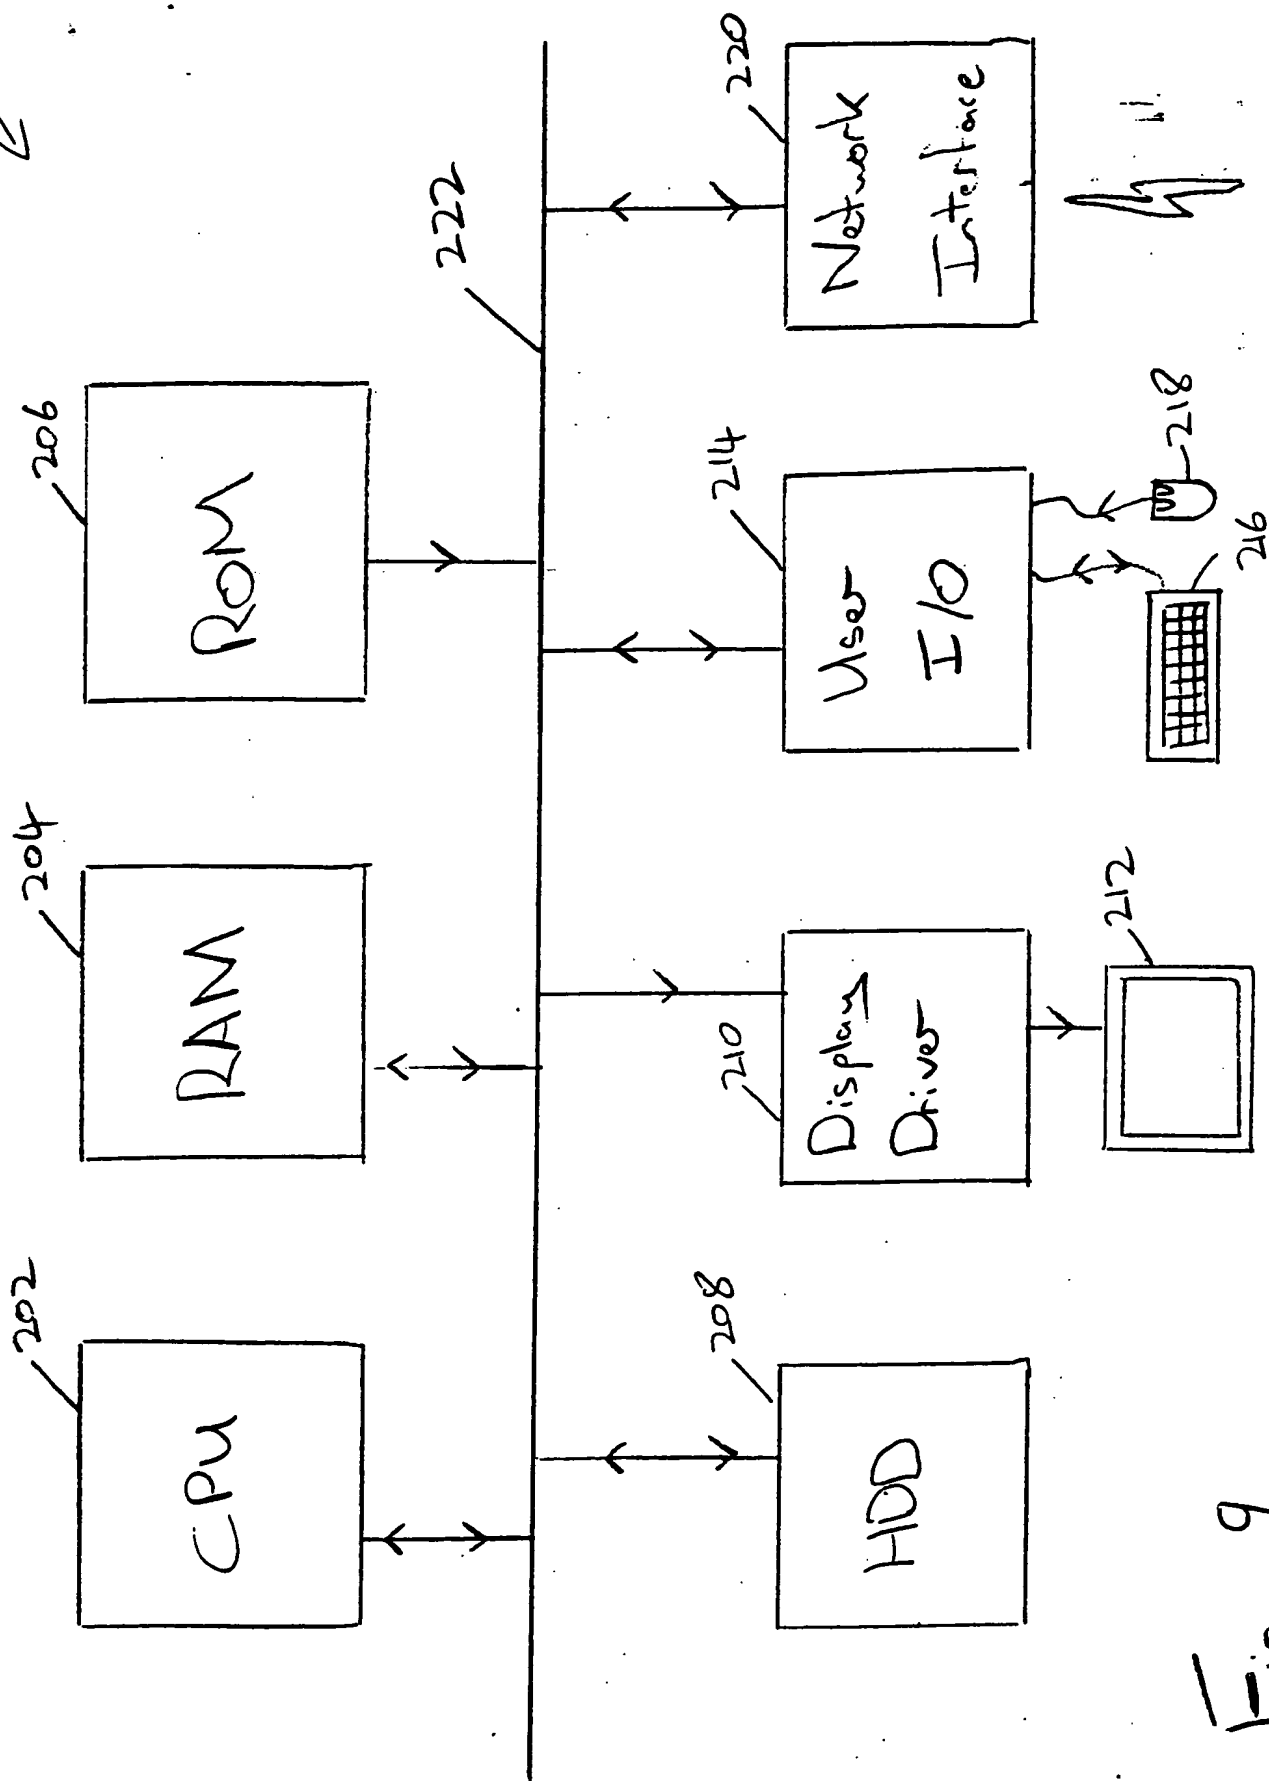


Fig. 9

10/11

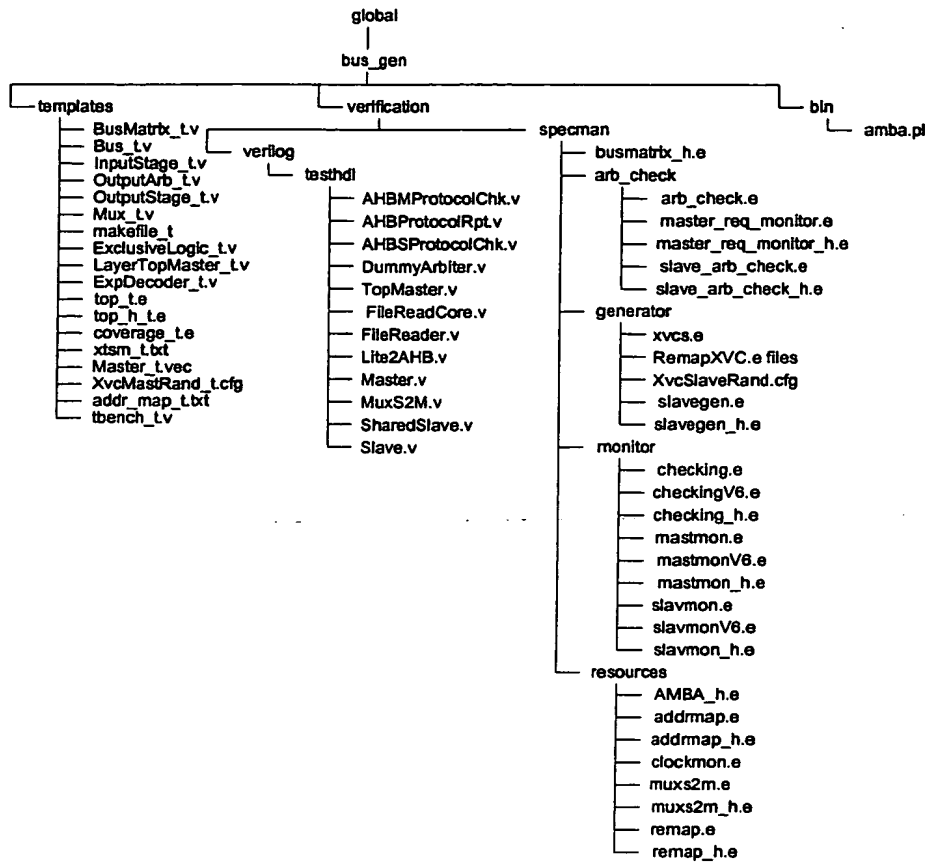


Figure 10

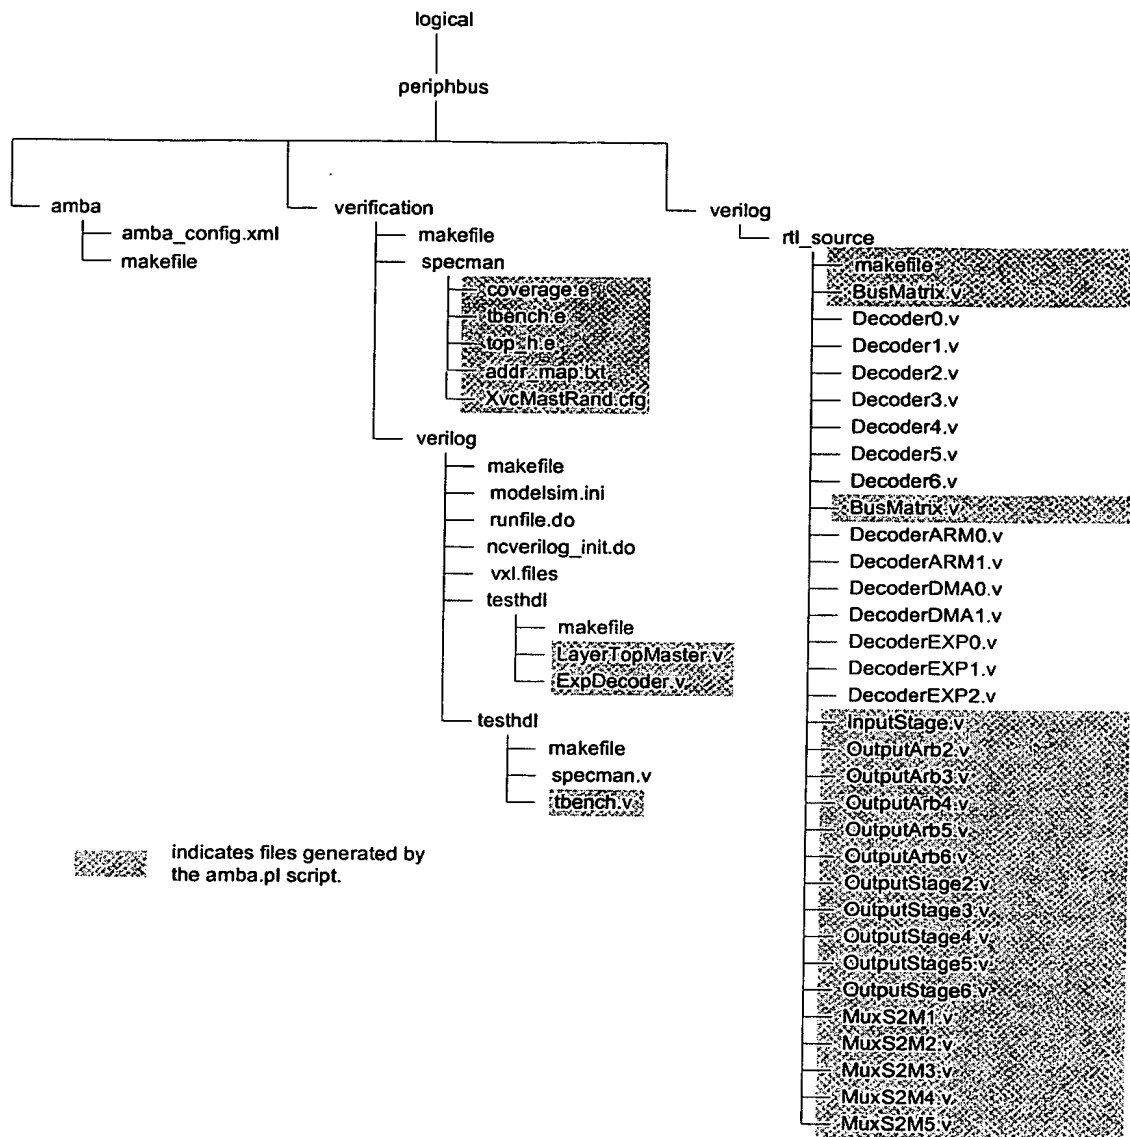


Figure 11